

# Revelator 10" Woofer



**Type Number:** 26W/8861T00

#### Features:

The Revelator series has for years been celebrated for producing the best sounding electro dynamic transducers in the world. Since ScanSpeak was founded in 1970, the audio engineers and R&D experts working on the line have been on a quest to create drivers that reveal all the sound in recordings, hiding nothing from the listener. This quest has resulted in several revolutionary inventions that remove distortion in the magnet systems and in the moving parts of the speaker. The philosophy is that the sound has to be very dynamic, giving a perfect transient response and providing tonal balance.

The latest generation of the Revelator woofers incorporates a new aluminum cone design, resulting in an impressive transient response. The output is incredibly natural sounding bass that challenges the listener to tell the difference between the real thing and its reproduction.


Driver Highlights: Low loss linear suspension, SD-1 motor system, hard paper cone



#### Specs:

| Electrical Data         |      |      |                 | Power handling                   |     |      |
|-------------------------|------|------|-----------------|----------------------------------|-----|------|
| Nominal impedance       | Zn   | 8    | ohm             | 100h RMS noise test (IEC)        | 170 | W    |
| Minimum impedance       | Zmin |      | ohm             | Long-term Max System Power       |     | W    |
| Maximum impedance       | Zo   |      | ohm             | (IEC)                            |     |      |
| DC resistance           | Re   | 6.2  | ohm             | Max linear SPL (rms) @ power     |     | dB/W |
| Voice coil inductance   | Le   | 0.35 | mH              | Short Term Max power             |     | W    |
| T-S Parameters          |      |      |                 | Voice Coil and Magnet Parameters |     |      |
| Resonance Frequency     | fs   | 19   | Hz              | Voice coil diameter              | 50  | mm   |
| Mechanical Q factor     | Qms  | 5.2  |                 | Voice coil height                |     | mm   |
| Electrical Q factor     | Qes  | 0.33 |                 | Voice coil layers                |     |      |
| Total Q factor          | Qts  | 0.31 |                 | Height of the gap                |     | mm   |
| Ratio fs/Qts            | F    |      |                 | Linear excursion +/-             | 9   | mm   |
| Force factor            | BI   | 9.9  | Tm              | Max mech. excursion +/-          | 14  | mm   |
| Mechanical resistance   | Rms  | 1    | Kg/s            | Flux density of gap              |     | mWb  |
| Moving mass             | Mms  | 43.5 | g               | Total useful flux                |     | mWb  |
| Suspension compliance   | Cms  |      | mm/N            | Diameter of magnet               |     | mm   |
| Effective cone diameter | D    |      | cm              | Height of magnet                 |     | mm   |
|                         | Sd   | 320  | cm <sup>2</sup> | Weight of magnet                 |     | Kg   |
| Effective piston area   | Vas  | 234  | Itrs            | Trongine or magnet               |     | J    |
| Equivalent volume       | vas  |      |                 |                                  |     |      |
| Sensitivity             |      | 88.5 | dB              |                                  |     |      |
| Ratio BL/√(Re)          |      |      |                 |                                  |     |      |

## Frequency:

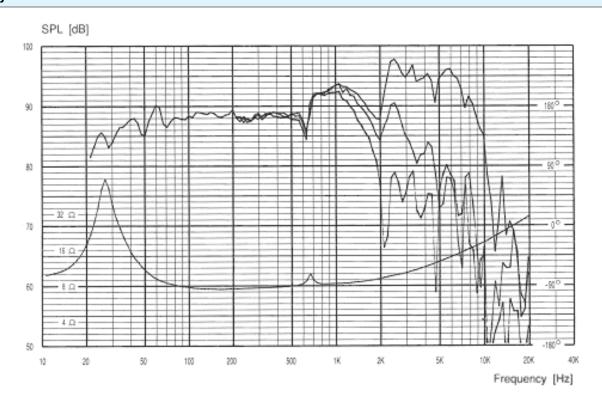

### **Mechanical Dimensions:**

